


## CABLE & WIRE

### HAN- H07BQ-F PUR insulated power cable

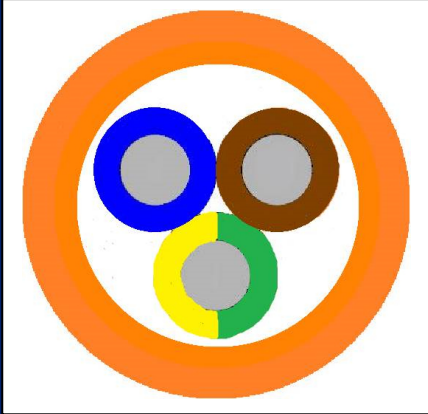

#### Highlights

PUR connection cable for medium mechanical stress for power tools, heating devices and transportable machines. This cable is characterized by its high resistance to oils, fats, acids and alkalis. The outer jacket is abrasion and cut resistant, as well as notch-resistant and can be used outdoors for a short time.

#### Construction

Conductor:

Stranded bare copper wires  
acc. IEC 60228 cl. 5

Core insulation:

EPR

Core identification:

acc. DIN VDE 0293 part 308

Outer sheath:

PUR

Sheath colour:

orange

#### Technical data

Nominal voltage:

U<sub>0</sub>/U: 450V/750V

Test voltage:

2.500 V

Temperature range:

fixed installation: -40 °C up to +80 °C

flexible application: -40 °C up to +80 °C

Minimum bending radius:

fixed installation: 5 x d

flexible application: 12 x d

#### Packaging

drums or reels, also in cut lengths

Created by: PK/NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,  
CUSTOMER-ORIENTED**

**HEINRICH THULESIUS GMBH & CO. KG**  
Zum Panrepel 15, D-28307 Bremen, GERMANY



#### SERVICE

Tel: +49 (0) 421-48 95-0

Fax: +49 (0) 421-48 95-225

E-Mail: [info@thulesius.de](mailto:info@thulesius.de)

[www.thulesius.de](http://www.thulesius.de)

## CABLE & WIRE

### HAN- H07BQ-F PUR insulated power cable

#### Dimension

No. of cores	Cross section mm <sup>2</sup>
2	1.50 - 6.00
3	1.50 - 6.00
4	1.50 - 16.0
5	1.50 - 16.0

Further dimensions available on request.

The most usual dimensions are available from stock.

Created by: PK/NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,  
CUSTOMER-ORIENTED**

**HEINRICH THULESIUS GMBH & CO. KG**  
Zum Panrepel 15, D-28307 Bremen, GERMANY



#### SERVICE

Tel: +49 (0) 421-4895-0  
Fax: +49 (0) 421-4895-225  
E-Mail: [info@thulesius.de](mailto:info@thulesius.de)  
[www.thulesius.de](http://www.thulesius.de)

**SUMITOMO  
ELECTRIC  
GROUP**