


HEAT-SHRINKABLE TUBING

HTS-FR25

SUMITUBE®, Made of radiation cross-linked Elastomer, thin-walled, highly flexible

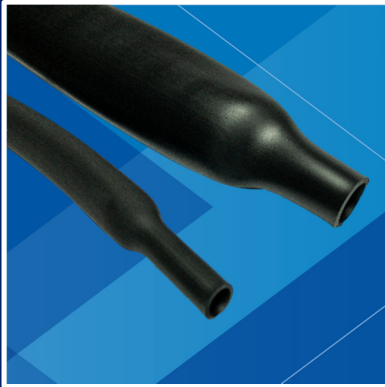

Highlights

- Operating temperature - 75 °C to 150 °C
- Flame retardant
- Little longitudinal change
- Flexible
- Diesel- and fluid resistant
- Shrink rate 2:1
- Shrink temperature: 170 °C
- Colour: black
- RoHS and REACH conform
- Approvals: ASTM D, SAE-AS23053

Dimensions

Art.-No.	Before Shrinkage (mm)		After Shrinkage (mm)		Standard Packaging	
	Inch	Inner Diameter (min)	Inner Diameter (max.)	Wall Thickness (nom.)	Spool (m)	Box (m)
Z87133	1/8	3.20	1.60	0.60 - 0.90	150	600
Z87134	3/16	4.80	2.40	0.65 - 1.05	60	300
Z87135	1/4	6.40	3.20	0.70 - 1.10	60	300
Z87136	3/8	9.50	4.75	0.80 - 1.20	60	180
Z87137	1/2	12.70	6.4	0.90 - 1.50	60	180
Z87138	3/4	19.10	9.5	1.10 - 1.80	30	90
Z87139	1	25.40	12.7	1.35 - 2.25	30	90
Z87140	1-1/2	38.00	19.1	1.90 - 2.90	30	60
Z87141	2	51.00	25.4	2.30 - 3.30	30	60
Z87142	3	76.00	38.1	2.60 - 3.80	15	15
Z87143	4	102.00	50.8	2.90 - 4.30	10	10

Technical characteristics

Property	Test	Inspection requirements	Typical values
Physical	Longitudinal change	SAE-AS23053, ± 10%	Passed
	Tensile strength	SAE-AS23053, min. 11,7 MPa	≥ 17 MPa
	Elongation at break	SAE-AS23053, min. 250%	≥ 400%

Created by: VS 20.11.2020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,
CUSTOMER-ORIENTED**

HEINRICH THULESIUS GMBH & CO. KG
Zum Panrepel 15, D-28307 Bremen, GERMANY



SERVICE

Tel: +49 (0) 421-48 95-0
Fax: +49 (0) 421-48 95-225
E-Mail: info@thulesius.de
www.thulesius.de

HEAT-SHRINKABLE TUBING

HTS-FR25

SUMITUBE®, Made of radiation cross-linked Elastomer, thin-walled, highly flexible

Technical characteristics

Property	Test	Inspection requirements	Typical values
Thermal	Operating temperature	SAE-AS23053	-75 °C to 150°C
	Min. Shrink temperature	For complete shrinkage	170 °C
	Shrinkage begins at		100 °C
	Heat shock (200 °C x 4 h)	SAE-AS23053, no cracking, flowing or dripping	Passed
	Elongation after thermal aging (150 °C x 168 h)	SAE-AS23053, min. 200%	≥ 300%
	Tensile strength after thermal aging (150 °C x 168 h)	SAE-AS23053, min. 10,4 MPa	≥ 12 MPa
Chemical	Cold bending (-75 °C x 4 h)	IEC 60684-3-271, no cracks	-75°C x 4h
	Copper Corrosion	SAE-AS23053, no corrosion	Passed
	Flammability	ASTM D 2671, Procedure B	Passed
	Water absorption	ASTM D 570, max. 2,0%	≤ 1,4%
	Fluid resistance (24 °C x 24 Std.)	SAE-AS23053, Diesel included, min. 10,4 MPa (tensile strength)	≥ 13 MPa
Electrical	Fungus resistance	SAE-AS23053, no growth	Passed
	Ozone resistance	NF F 00-608, no cracking or sweating	Passed
	Volume resistance	SAE-AS23053, min. 10 ⁹ Ω/cm	≥ 10 ¹¹ Ω/cm
	Dielectric strength	SAE-AS23053, min. 11,9 kV/mm	≥ 18 kV/mm

Note: SAE-AMS-DTL 23053/16 does not include dimensions for very thin walls. For standard dimensions see Sumitube FR25. Megol transformer oil (J10) test: thermal aging (110 °C x 168 hours) / immersion. Tensile strength after aging: > 10.4 MPa: Passed. Elongation after aging: > 200%: passed.

Created by: VS 20.11.2020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,
CUSTOMER-ORIENTED**

HEINRICH THULESIUS GMBH & CO. KG
Zum Panrepel 15, D-28307 Bremen, GERMANY



SERVICE

Tel: +49 (0) 421-48 95-0
Fax: +49 (0) 421-48 95-225
E-Mail: info@thulesius.de
www.thulesius.de

**SUMITOMO
ELECTRIC
GROUP**