


PROTECTION SLEEVES

HTR-VHG10

Protecto Glass sleeving impregnated with silicone, thick-walled

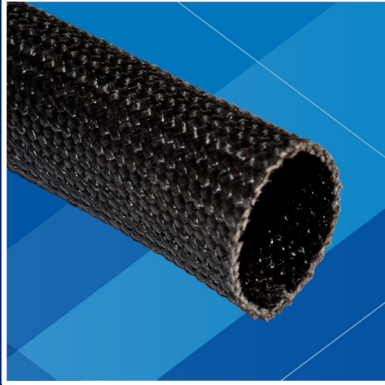

Highlights

- Halogen free
- Operating temperature: -70 °C bis 180
- Good abrasion resistance
- Nice touch and feel
- Self-extinguishing
- Highly resilient: recovers roundness after being flattened
- Good chemical resistance
- Standard colour: black

Dimensions

Art.-No.	Reference	Inner Diameter nom. (mm)	Tolerance (mm)	Wall thickness (mm)	Spool (m)
ZXXXXX	HTR-VGH10-5	5	± 0,5	1 ± 0,3	100
ZXXXXX	HTR-VGH10-9	9	± 0,5	1 ± 0,3	100
ZXXXXX	HTR-VGH10-9.5	9,5	± 0,5	1 ± 0,3	100
ZXXXXX	HTR-VGH10-11	11	± 0,5	1 ± 0,3	100
ZXXXXX	HTR-VGH10-13	13	± 0,5	1 ± 0,3	50
ZXXXXX	HTR-VGH10-14	14	± 0,5	1 ± 0,3	50
ZXXXXX	HTR-VGH10-17	17	± 0,5	1 ± 0,3	50
ZXXXXX	HTR-VGH10-18	18	± 0,5	1 ± 0,3	50

Technical characteristics

Property	Test	Inspection requirements	Typical values
Thermal	Simulation of real operating conditions	10 days at + 375 °C	Passed
	Operating temperature	Peaks to +450 °C	-70 °C to +350 °C
	Heat resistance	Bending at -70 °C, IEC 60684 - Teil 2 Satz 13, 48 Std. at +400 °C	No cracking
Chemical	Chemical resistance	Excellent resistance to solvents. compatible with most insulating varnishes	
	Flammability	FMVSS 302	Self-extinguishing

Created by: VS 20.11.2020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,
CUSTOMER-ORIENTED**

HEINRICH THULESIUS GMBH & CO. KG
Zum Panrepel 15, D-28307 Bremen, GERMANY



SERVICE

Tel: +49 (0) 421-48 95-0
Fax: +49 (0) 421-48 95-225
E-Mail: info@thulesius.de
www.thulesius.de