


CABLE TIES

HTQ-BSK / HTQ-BSS

QuickLok- Cable Tie Mounts, Adhesive- or Screw-Mount

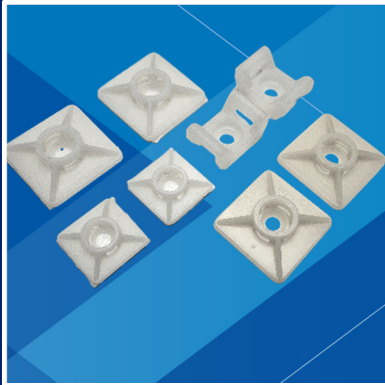

Highlights

- Temperature range
- 40 °C up to 85 °C
- Easy assembly with
adhesive version
- Extreme load capacity with
screwable version
- Space-saving
- Self-extinguishing
- Excellent resistance
against many chemicals

Dimensions

Art.-No. natural	Reference	Mount (mm)			Cable Tie Width mm / max.
		Length	Width	Thickness	
Adhesive					
Z83205	HTQ-BSK-3/4	19.0	19.0	4.30	3.60
Z83207	HTQ-BSK-1	27.0	27.0	4.30	4.80
Screwable					
Z83208	HTQ-BSS-1	27.0	27.0	8.00	4.80
Z83203	HTQ-BSS-2	22.5	15.0	11.0	9.0

Created by: NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,
CUSTOMER-ORIENTED**

HEINRICH THULESIUS GMBH & CO. KG
Zum Panrepel 15, D-28307 Bremen, GERMANY



SERVICE

Tel: +49 (0) 421-4895-0
Fax: +49 (0) 421-4895-225
E-Mail: info@thulesius.de
www.thulesius.de

CABLE TIES

HTQ-BSK / HTQ-BSS

QuickLok- Cable Tie Mounts, Adhesive- or Screw-Mount

Technische Daten

Property	Test	Inspection requirements
Material	Polyamid 6.6, natural	
Thermal	Operating temperature, natural	MIL-S 23190D and UL, -40 °C - 85 °C
	Melting point	ca. +250 °C
Electrical	Dielectric strength	50kV / mm
Chemical	Flammability	UL94-V2, self-extinguishing
	Water absorption at 23 °C saturation	2.70 - 2.80%
	Resistance to chemicals	Excellent resistance against: alkaline, oil, oil-products, grease, chlorat-solvent limited resistance to: acids no resistance to: phenol
	Corrosion	5%, limited oxygen index (LOI): 27%

Created by: NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,
CUSTOMER-ORIENTED**

HEINRICH THULESIUS GMBH & CO. KG
Zum Panrepel 15, D-28307 Bremen, GERMANY



SERVICE

Tel: +49 (0) 421-4895-0
Fax: +49 (0) 421-4895-225
E-Mail: info@thulesius.de
www.thulesius.de