


# CABLE TIES

## HTQ-WV

QuickLok-Releasable Cable Tie

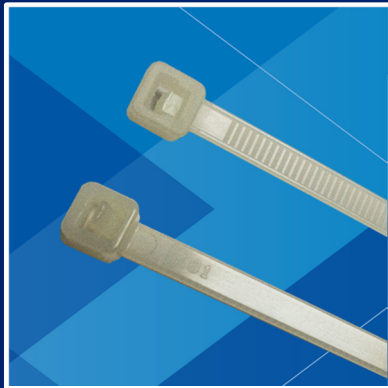

### Highlights

- Temperature range - 40 °C up to 85 °C
- Easy to reopen
- Particularly inexpensive due to multiple use
- Flexible
- Self-extinguishing
- Excellent resistance against many chemicals
- Approval: UL, MIL

### Dimension

Art.-No. natural	Reference	Cable Tie (mm)		Bundle Diameter mm / max.	Loop Tensile Strength min. kg
		Length	Width		
Z80224	HTQ-WV-200 ZW	200	4.80	50	22.2
Z80227	HTQ-WV-300 ZW	300	4.80	76	22.2

### Technical characteristics

Property	Test	Inspection requirements
Material	Polyamid 6.6, natural	
Thermal	Operating temperature, natural	MIL-S 23190D and UL, -40 °C - 85 °C
	Melting point	ca. +250 °C
Electrical	Dielectric strength	50kV / mm
Chemical	Flammability	UL94-V2, self-extinguishing
	Water absorption at 23 °C saturation	2.70 - 2.80%
	Resistance to chemicals	Excellent resistance against: alkaline, oil, oil-products, grease, chlorat-solvent limited resistance to: acids no resistance to: phenol
	Corrosion	5%, limited oxygen index (LOI): 27%

Created by: NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,  
CUSTOMER-ORIENTED**

**HEINRICH THULESIUS GMBH & CO. KG**  
Zum Panrepel 15, D-28307 Bremen, GERMANY



#### SERVICE

Tel: +49 (0) 421-4895-0  
Fax: +49 (0) 421-4895-225  
E-Mail: [info@thulesius.de](mailto:info@thulesius.de)  
[www.thulesius.de](http://www.thulesius.de)