


CABLE TIES

HTB-BS

BarLok®-Cable Tie Mounts, Adhesive- or Screw-Version

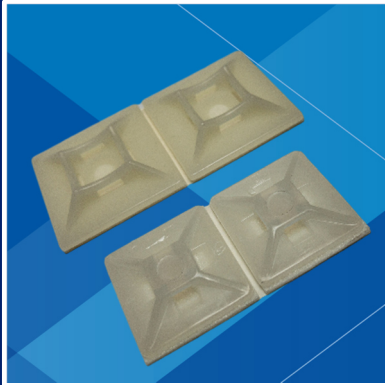

Highlights

- Temperature range
- 40 °C up to 85 °C
- Highly effective acrylic- or rubber adhesives
- Flexible applicable - mount from any of four sides
- Easy removing of backing film (adhesive version)
- Self-extinguishing
- Excellent resistance against many chemicals
- Approval: UL

Dimensions

Art.-No. natural	Reference	Mount (mm)			Cable Tie Width mm / max.	MIL- Standard	VG- Approval
		Length	Width	Thickness			
Reference A - adhesive							
Z83001	HTB-BS-3/4 A	21	21	4.80	3.80	-	-
Z83002	HTB-BS-1 A	27	27	6.90	5.10	-	-
Reference B - screwable							
Z83003	HTB-BS-1 B	27	27	6.60	5.10	-	-

Technical characteristics

Property	Test	Inspection requirements
Material	Polyamid 6.6, natural	
Thermal	Operating temperature	MIL-S 23190D and UL, -40 °C - 85 °C natural
	Melting point	ca. +250 °C
Chemical	Flammability	Self-extinguishing, Flammability rating: V-2

Created by: NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,
CUSTOMER-ORIENTED**

HEINRICH THULESIUS GMBH & CO. KG
Zum Panrepel 15, D-28307 Bremen, GERMANY



SERVICE

Tel: +49 (0) 421-4895-0
Fax: +49 (0) 421-4895-225
E-Mail: info@thulesius.de
www.thulesius.de

**SUMITOMO
ELECTRIC
GROUP**